




4



TWO

NON METALLISED

REUSE
PROTECT
PRESERVE

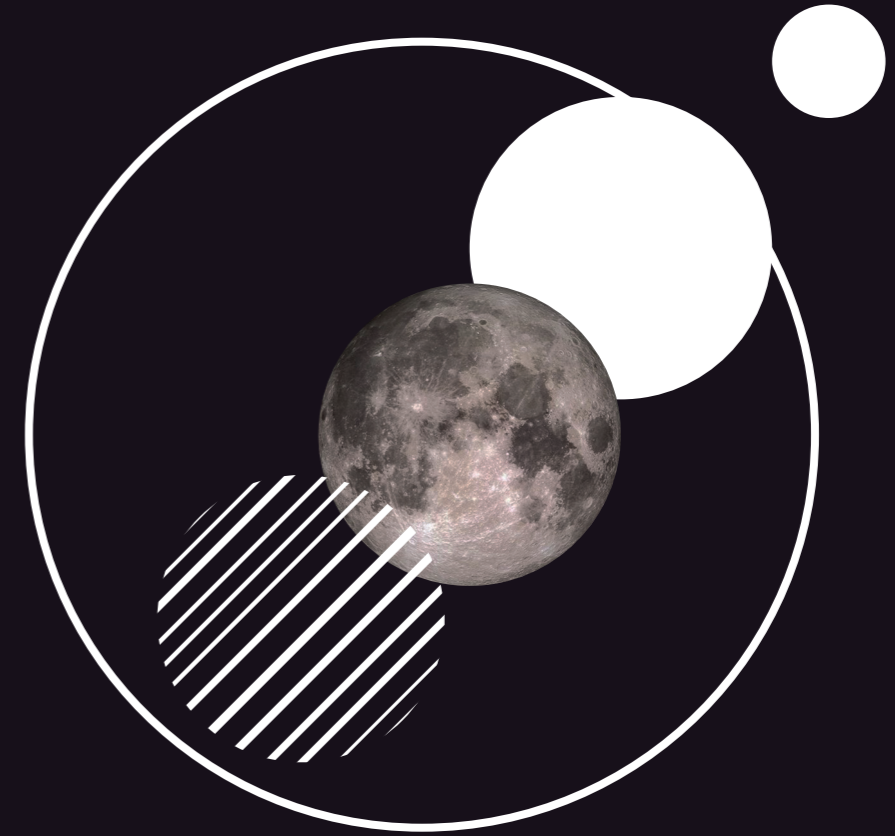

ROLLER SHADE SOLAR CONTROL FABRIC



Suitable for installation with:



Roller Shades



Panel Glide Shades



Vertical Shades



TWO

MADE FROM RECYCLED POLYESTER
100% PVC FREE
RECYCLABLE

NON METALLISED

ROLLER SHADE SOLAR CONTROL FABRIC



TWO

Non Metallised

- Openness Factor . **Of** •
- Ultraviolet Transmittance . **Tuv** •
- Light Transmittance . **Tv** •
- Light Reflectance . **Rv** •
- Solar Transmittance . **Ts** •
- Solar Reflectance . **Rs** •
- Solar Absorption . **As** •
- G Value . **G tot** •

6%
openness factor

300 cm
fabric width

0.55 mm
thickness

225 g/m²
weight

THIS FABRIC IS MADE FROM RECYCLED POLYESTER

FENESTRATION PROPERTIES

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value	
								C Glaze	D Glaze
PEARL	6%	14%	25%	47%	33%	48%	19%	0.41	0.27
PEWTER	6%	11%	15%	31%	28%	42%	30%	0.43	0.27
BRONZE	6%	11%	16%	40%	28%	45%	27%	0.42	0.27
CHARCOAL	6%	9%	12%	26%	26%	39%	35%	0.44	0.27

Data is current at time of printing. Please check website for most current information.

Care Instructions

Remove dust with vacuum cleaner or compressed air. Do not scrub. Use of solvents or abrasive substance will damage the coating of the fabric. All chemicals will cause permanent damage to the fabric. When cleaning windows raise the blind. Avoid any spray or splatter of chemicals on the fabric.

Width


Maximum Roller Shade width: 3000 mm

Fabric Warranty


5 Years (internal use only)

Railroad


This fabric can be railroaded

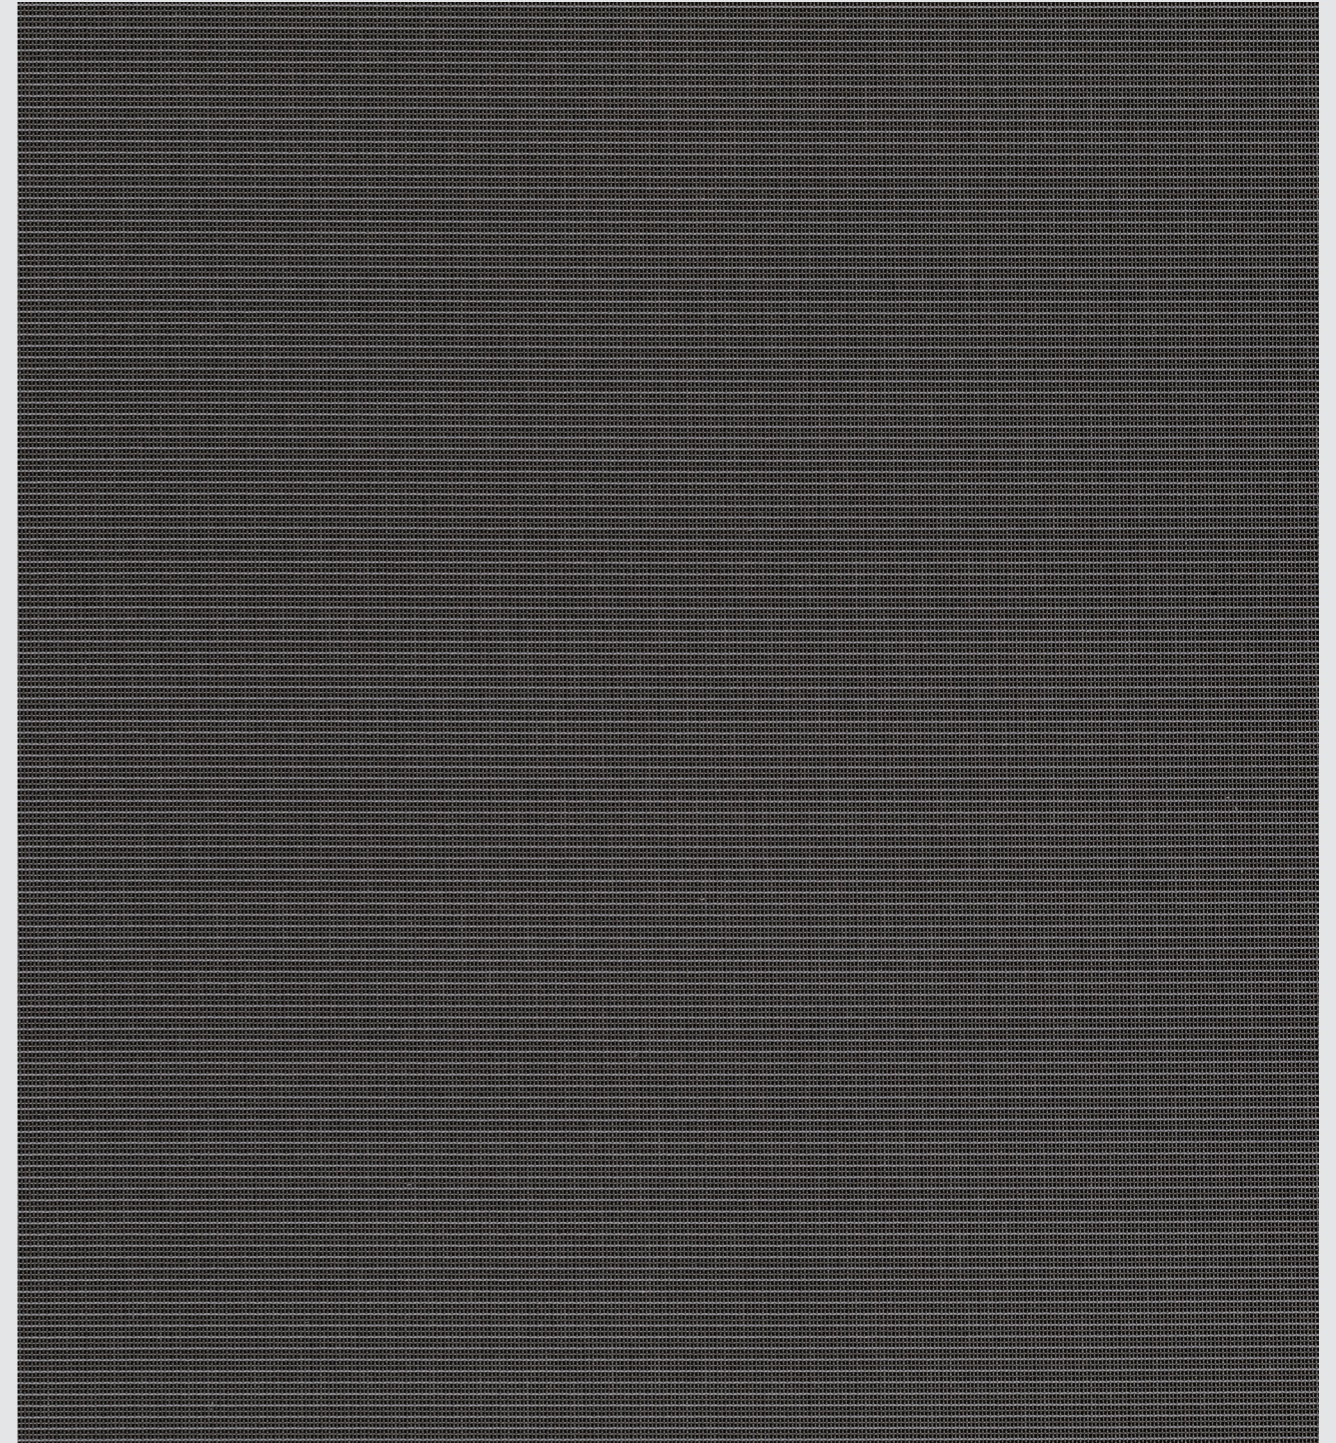


CHARCOAL 1887

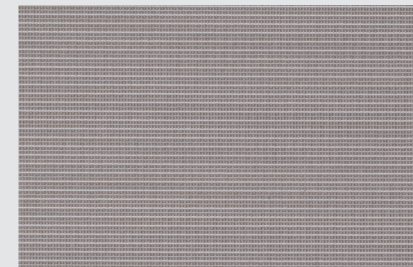

PEARL 1500

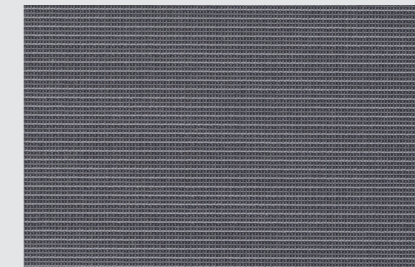

PEWTER 2780

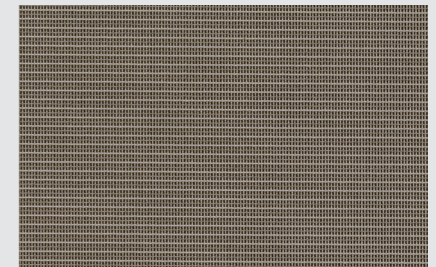

BRONZE 4999



Order a memo sample: info@climatered fabrics.com.au