


A FABRIC WITH EXCELLENT VIEW THROUGH PROPERTIES  
NON COMBUSTIBLE, PVC FREE AND THERMAL SHIELD

# SCREEN NATURE

## Metallised

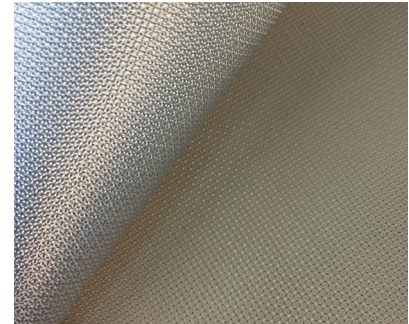

- Noncombustible
- Mineral composition for a minimal environmental impact
- Very good glare control and solar reflectance
- PVC free

### Suitable for internal installation using:



Roller Shades



Panel Glide Shades



Vertical Shades

Internal installation only.

<b>Openness Factor:</b>	4%
<b>Fabric Width:</b>	240 cm
<b>Thickness:</b>	0.21 mm
<b>Weight:</b>	165 g/m <sup>2</sup>
<b>Composition:</b>	Glass Fabric with fire proof PVC-free and halogen-free coating
<b>Fire Retardancy:</b>	Compliant to AS1530.2 and AS1530.3.

Certificates available on request.

### Fenestration Properties:

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value: C Glaze	G Value: D Glaze	
TITANIUM	4%	6%	7%	70%	7%	71%	22%	0.27	0.14	Openess Factor / <b>OF</b>
LIGHT GREY	4%	6%	6%	70%	6%	71%	23%	0.28	0.14	Ultraviolet Transmittance / <b>Tuv</b>
LINEN	4%	6%	6%	70%	7%	71%	22%	0.27	0.13	Light Transmittance / <b>Tv</b>
PEARL	4%	6%	6%	69%	6%	71%	23%	0.27	0.14	Light Reflectance / <b>Rv</b>
GREY	4%	6%	5%	69%	5%	71%	24%	0.27	0.14	Solar Transmittance / <b>Ts</b>
BRONZE	4%	6%	5%	67%	5%	71%	24%	0.28	0.14	Solar Reflectance / <b>Rs</b>
CHARCOAL	4%	6%	4%	66%	4%	70%	26%	0.28	0.14	Solar Absorption / <b>As</b>
										G Value / <b>G tot</b>

G tot: Total solar factor, ratio of the energy transmitted through a window and solar protection device. Classification and reference glazing according to standard EN 14501

Data is current at time of printing. Please check website for most current information.

### Certification:



UL GREENGUARD®  
Gold Certified

Guarantee of indoor air  
quality (VOC)



OEKO-TEX  
Standard 100


Textiles tested for harmful  
substances

<b>Antibacterial</b>	ASTME 2180 (more than 99% of bacteria destroyed)
<b>Light-fastness:</b>	7/8 - ISO 105 B02:2014
<b>Care Instructions:</b>	Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. On metallised side, spot clean by gently blotting with a slightly damp cloth. Leave the blind down until completely dry.
<b>Warranty:</b>	5 year warranty as complete roller shade systems for internal use. For more information regarding warranties and extended warranties, please contact Climate Ready Fabrics.
<b>Sustainability:</b>	<span style="display: inline-block; width: 10px; height: 10px; background-color: #008080; border-radius: 50%; margin-right: 5px;"></span> 100% recyclable <span style="display: inline-block; width: 10px; height: 10px; background-color: #008080; border-radius: 50%; margin-left: 20px; margin-right: 5px;"></span> PVC-free


**Colour Range:**



Charcoal M1307



Titanium M1301



Pearl M1304



Linen M1303



Light Grey M1302



Grey M1305



Bronze M1306

Colours are to be used for reference purposes only. For an accurate colour sample, please contact Climate Ready Fabrics for a fabric swatch sample.

© Copyright January 2020 Climate Ready® Fabrics  
 Specification information and other data are based on information available at the time of publication of this document and are subject to production tolerances and/or change without prior notice.