


A FABRIC WITH EXCELLENT VIEW THROUGH PROPERTIES
NON COMBUSTIBLE AND PVC FREE

SCREEN NATURE

Non Metallised

- Noncombustible
- Mineral composition for a minimal environmental impact
- Very good glare control
- PVC free

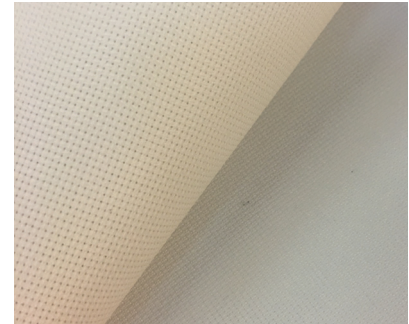

Suitable for internal installation using:



Roller Shades



Panel Glide Shades



Vertical Shades

Internal installation only.

Openness Factor:	4%
Fabric Width:	240 cm
Thickness:	0.23 mm
Weight:	165 g/m ²
Composition:	Glass fabric with fire proof PVC-free and halogen free coating
Fire Retardancy:	Compliant to AS1530.2 and AS1530.3.

Certificates available on request.

Fenestration Properties:

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value: C Glaze	G Value: D Glaze
WHITE	4%	8%	33%	63%	33%	58%	9%	0.36	0.18
LIGHT GREY	4%	9%	27%	51%	29%	51%	20%	0.39	0.20
LINEN	4%	7%	30%	59%	30%	56%	14%	0.36	0.19
SABLE	4%	7%	22%	46%	25%	46%	29%	0.40	0.22
PEARL	4%	7%	13%	29%	18%	34%	48%	0.46	0.25
GREY	4%	5%	7%	12%	8%	14%	78%	0.53	0.29
BRONZE	4%	5%	6%	10%	7%	11%	82%	0.54	0.30
CHARCOAL	4%	5%	5%	6%	5%	6%	89%	0.55	0.31

Openness Factor / OF
Ultraviolet Transmittance / Tuv
Light Transmittance / Tv
Light Reflectance / Rv
Solar Transmittance / Ts
Solar Reflectance / Rs
Solar Absorption / As
G Value / G tot

G tot: Total solar factor, ratio of the energy transmitted through a window and solar protection device. Classification and reference glazing according to standard EN 14501

Data is current at time of printing. Please check website for most current information.

Health Certification:




UL GREENGUARD®
Gold Certified


Guarantee of indoor air
quality (VOC)

Antibacterial:	ASTME 2180 (more than 99% of bacteria destroyed)
Light-fastness:	7/8 - ISO 105 B02:2014
Care Instructions:	Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. On metallised side, spot clean by gently blotting with a slightly damp cloth. Leave the blind down until completely dry.
Warranty:	5 year warranty as complete roller shade systems for internal use. For more information regarding warranties and extended warranties, please contact Climate Ready Fabrics.
Sustainability:	 100% recyclable PVC-free

Colour Range:




Charcoal 0440



White 0119




Light Grey 0348




Linen 0319



Sable 0410



Pearl 0349



Grey 0441



Bronze 1134

Colours are to be used for reference purposes only. For an accurate colour sample, please contact Climate Ready Fabrics for a fabric swatch sample.

© Copyright January 2020 Climate Ready® Fabrics
 Specification information and other data are based on information available at the time of publication of this document and are subject to production tolerances and/or change without prior notice.