




ReView

NON METALLISED

REUSE
PROTECT
PRESERVE

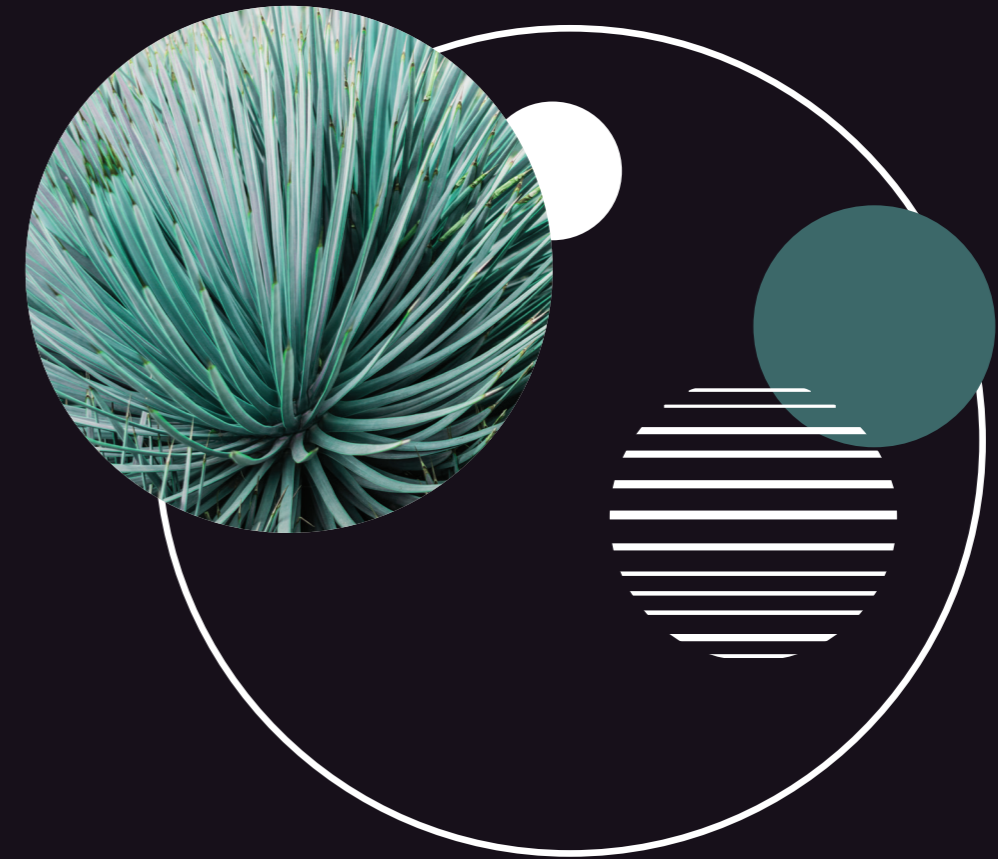

ROLLER SHADE SOLAR CONTROL FABRIC



Suitable for installation with:



Roller Shades



Panel Glide Shades



Vertical Shades



ReView

MADE FROM 90% RECYCLED PET / 10% VIRGIN POLYESTER
100% PVC FREE
RECYCLABLE

ROLLER SHADE SOLAR CONTROL FABRIC

NON METALLISED



ReView

Non Metallised

- Openness Factor . **Of** •
- Ultraviolet Transmittance . **Tuv** •
- Light Transmittance . **Tv** •
- Light Reflectance . **Rv** •
- Solar Transmittance . **Ts** •
- Solar Reflectance . **Rs** •
- Solar Absorption . **As** •
- G Value . **G tot** •

4%

openness factor

300 cm

fabric width

0.5mm

thickness

275g/m²


weight

THIS FABRIC IS MADE FROM 90% RECYCLED PET / 10% VIRGIN POLYESTER

FENESTRATION PROPERTIES

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value	
								C Glaze	D Glaze
WHITE	4%	10%	35%	59%	35%	54%	10%	0.40	0.26
BEIGE	4%	9%	28%	49%	31%	48%	20%	0.42	0.27
GREY	4%	8%	20%	38%	28%	40%	31%	0.44	0.27
BRONZE	4%	6%	6%	4%	7%	8%	84%	0.54	0.30
BLACK	4%	6%	6%	4%	6%	3%	90%	0.56	0.31

Data is current at time of printing. Please check website for most current information.

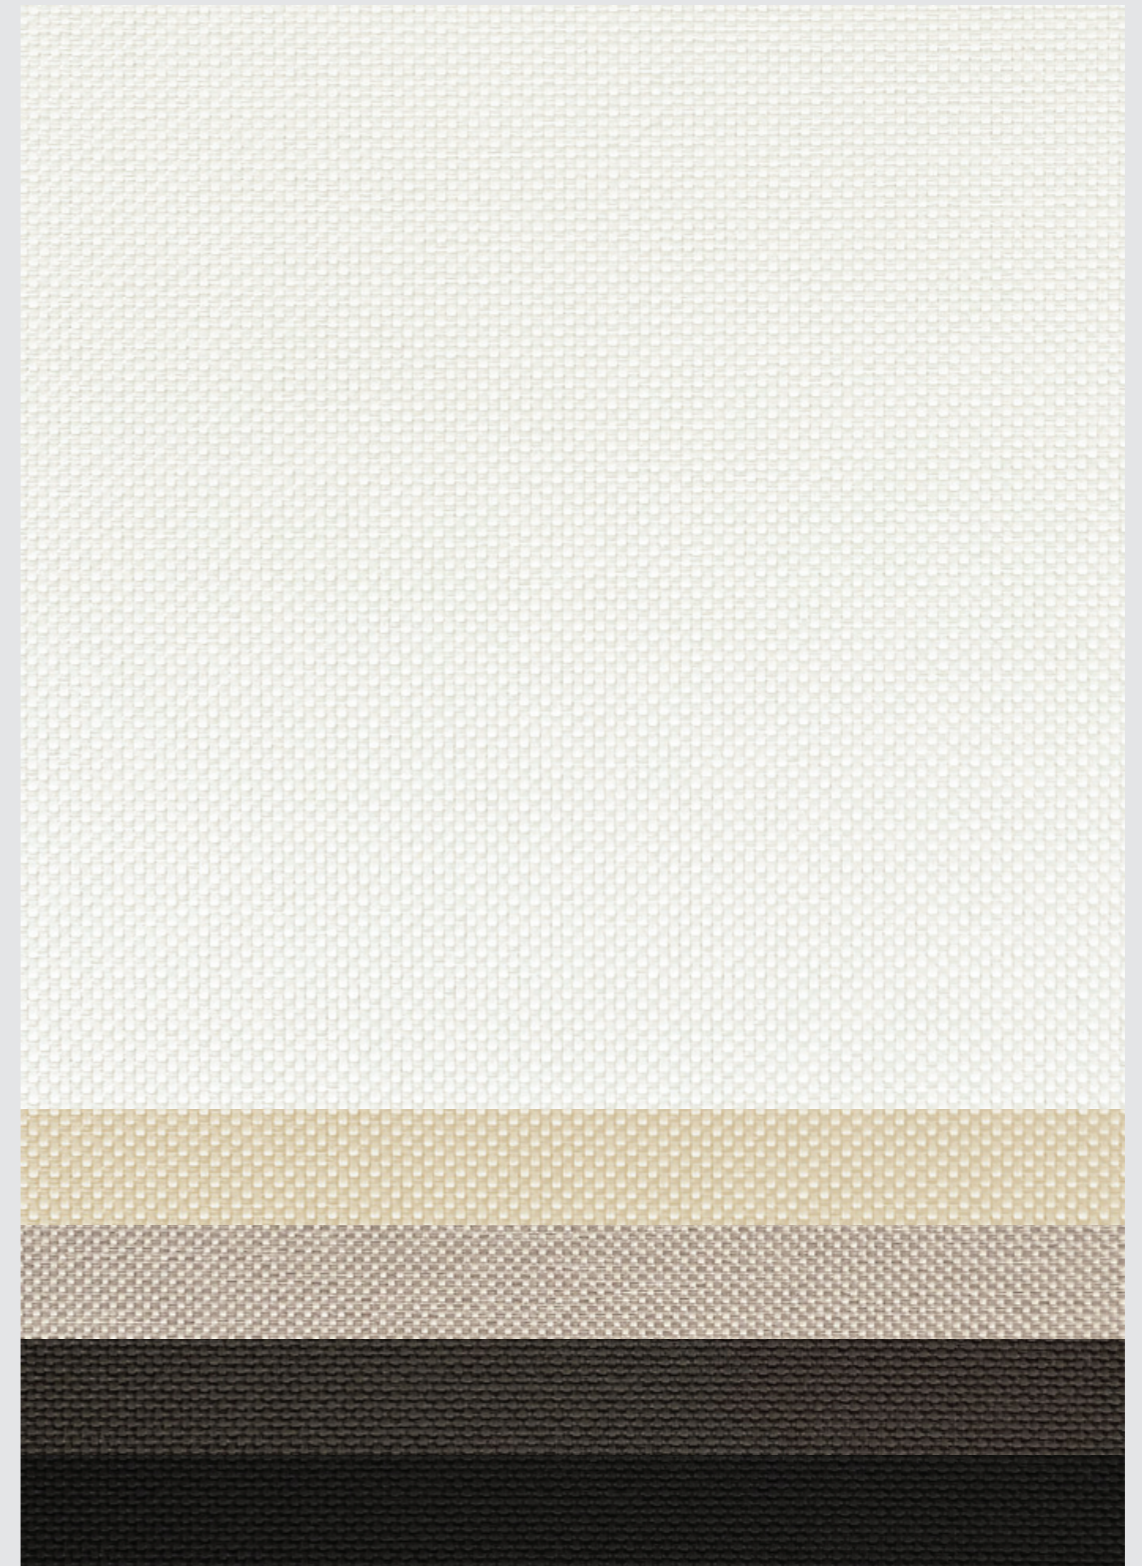

- WHITE 001
- BEIGE 002
- GREY 003
- BRONZE 004
- BLACK 005

Care Instructions

Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. Leave the blind down until completely dry.

Width

Maximum Roller Shade width: 3000 mm.

Fabric Warranty

5 Years (internal use only).

Railroad

This fabric can be railroaded



Order a memo sample: info@climatereadyfabrics.com.au