



6

SCREEN NATURE METALLISED



REUSE
PROTECT
PRESERVE



Suitable for installation with:



Roller
Shades




Panel Glide
Shades



Vertical
Shades



ROLLER SHADE SOLAR CONTROL FABRIC

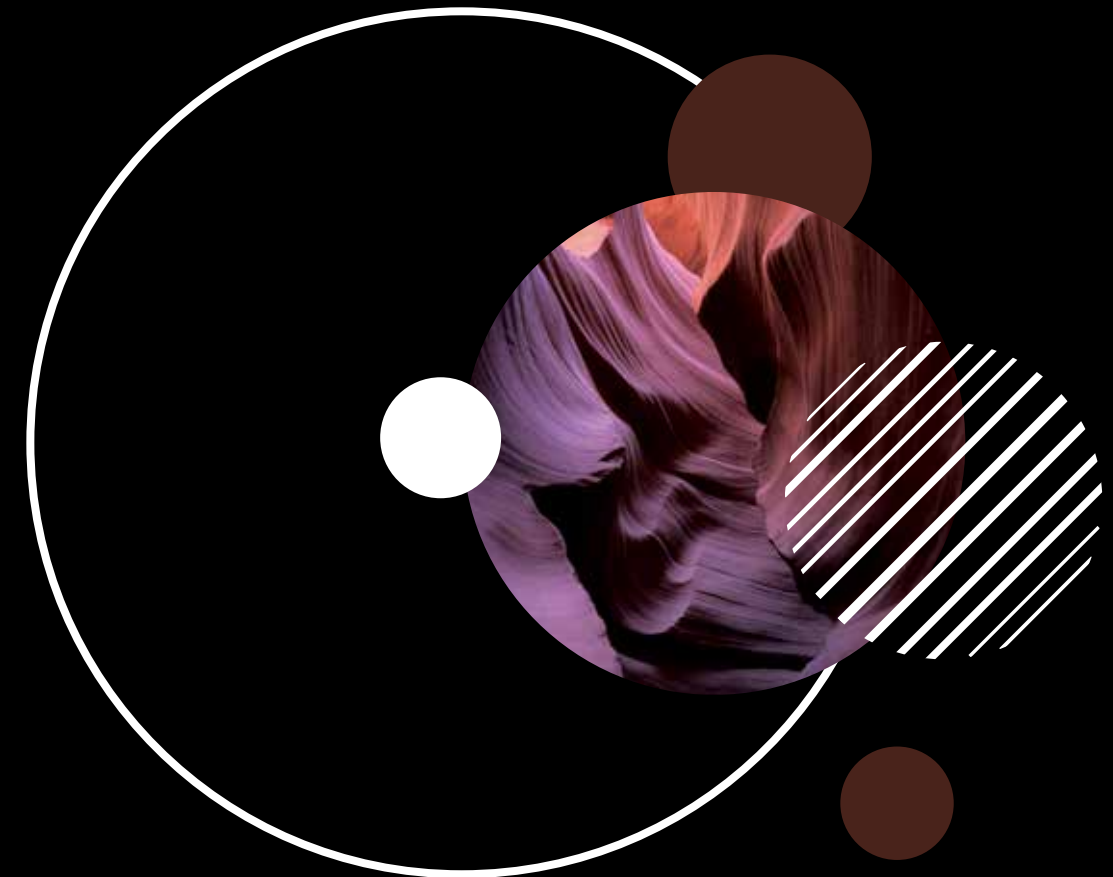

SCREEN NATURE

MADE FROM 100% FIBRE GLASS
100% PVC FREE
RECYCLABLE

METALLISED

ROLLER SHADE SOLAR CONTROL FABRIC



SCREENATURE
Metallised

- Openness Factor . **Of** •
- Ultraviolet Transmittance . **Tuv** •
- Light Transmittance . **Tv** •
- Light Reflectance . **Rv** •
- Solar Transmittance . **Ts** •
- Solar Reflectance . **Rs** •
- Solar Absorption . **As** •
- G Value . **G tot** •

4%

openness factor

240 cm

fabric width

0.21 mm

thickness

165 g/m²

weight

THIS FABRIC IS MADE FROM 100 % FIBRE GLASS

FENESTRATION PROPERTIES

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value	
								C Glaze	D Glaze
TITANIUM	4%	6%	7%	70%	7%	71%	22%	0.27	0.14
LIGHT GREY	4%	6%	6%	70%	6%	71%	23%	0.28	0.14
LINEN	4%	6%	6%	70%	7%	71%	22%	0.27	0.13
PEARL	4%	6%	6%	69%	6%	71%	23%	0.27	0.14
GREY	4%	6%	5%	69%	5%	71%	24%	0.27	0.14
BRONZE	4%	6%	5%	67%	5%	71%	24%	0.28	0.14
CHARCOAL	4%	6%	4%	66%	4%	70%	26%	0.28	0.14

Data is current at time of printing. Please check website for most current information.

Care Instructions

Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. On metallised side, spot clean by gently blotting with a slightly damp cloth. Leave the blind down until completely dry.

Width


Maximum Roller Shade width: 2400 mm.

Fabric Warranty

5 Years (internal use only).

Railroad

This fabric can **NOT** be railroaded.

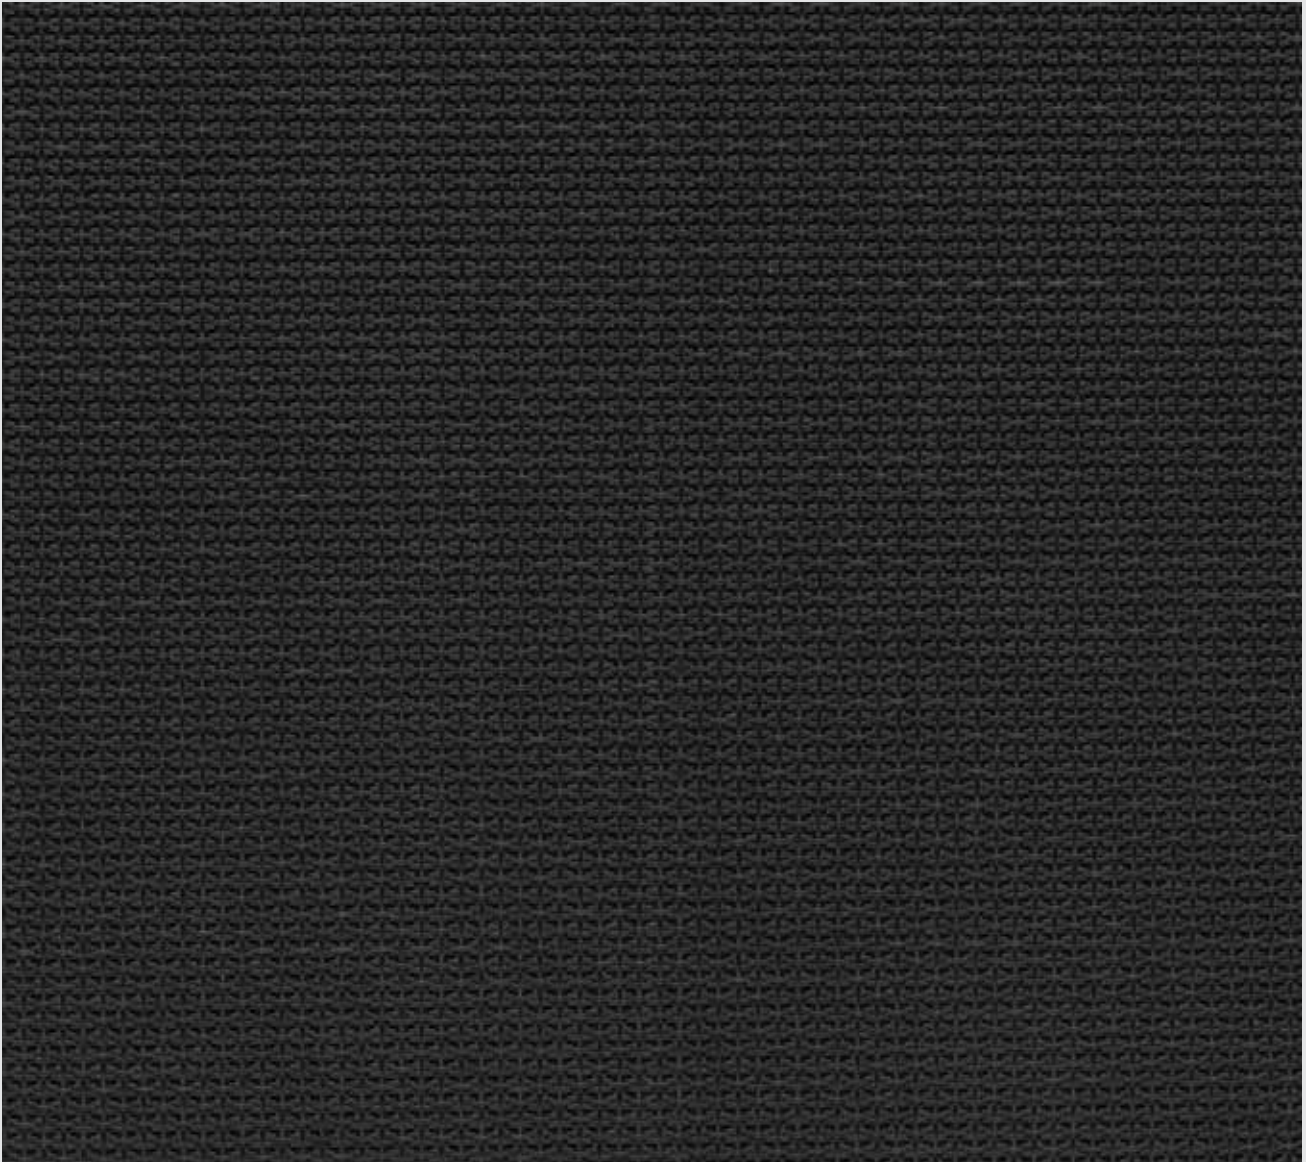

Order a memo sample: info@climatereadyfabrics.com.au