
Climate Ready。 Fabrics

5

**REUSE PROTECT PRESERVE** 

Suitable for installation with:
















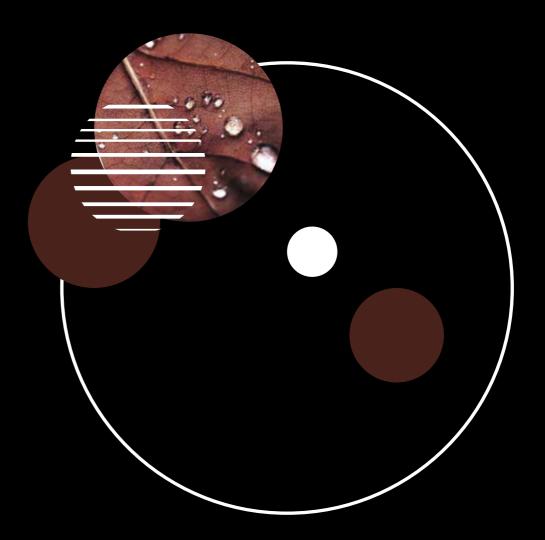

## **SCREEN NATURE**

MADE FROM 100% FIBRE GLASS 100% PVC FREE RECYCLABLE

**NON METALLISED** 

**ROLLER SHADE SOLAR CONTROL FABRIC** 

## SCREENATURE Non Metallised

Openness Factor . Of •

Ultraviolet Transmittance . Tuv •

Light Transmittance . Rv •

Light Reflectance . Rv •

Solar Transmittance . Ts •

Solar Reflectance . Rs •

Solar Absorption . As •

G Value . G tot •

4% openness factor

240 cm

(0.23 mm) thickness

 $\left(165\,\mathrm{g/m^2}\right)$ 

THIS FABRIC IS MADE FROM 100 % FIBRE GLASS

## **FENESTRATION PROPERTIES**

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value C Glaze D Glaze	
WHITE	4%	8%	33%	63%	33%	58%	9%	0.36	0.18
LIGHT GREY	4%	9%	27%	51%	29%	51%	20%	0.39	0.20
LINEN	4%	7%	30%	59%	30%	56%	14%	0.36	0.19
SABLE	4%	7%	22%	46%	25%	46%	29%	0.40	0.22
PEARL	4%	7%	13%	29%	18%	34%	48%	0.46	0.25
GREY	4%	5%	7%	12%	8%	14%	78%	0.53	0.29
BRONZE	4%	5%	6%	10%	7%	11%	82%	0.54	0.30
CHARCOAL	4%	5%	5%	6%	5%	6%	89%	0.55	0.31

Data is current at time of printing. Please check website for most current information.

## **Care Instructions**

Use a plant-based eraser gently to remove superficial stains. Light dust regularly with a feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. Handle the fabric with care using clean gloves).

Width


Maximum Roller Shade width: 2400 mm.

**Fabric Warranty** 

5 Years (internal use only).

Railroad

This fabric can **NOT** be railroaded.

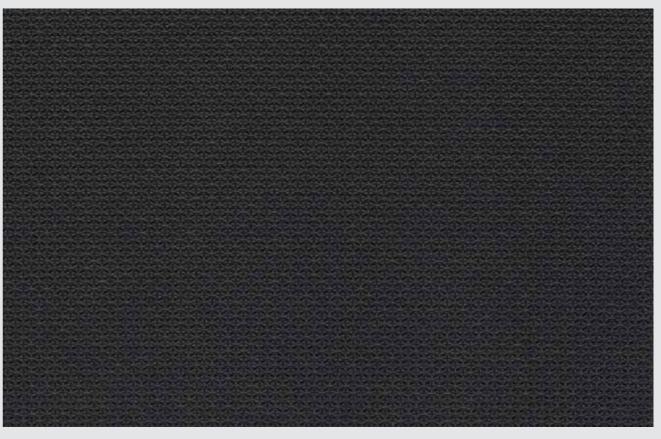

CHARCOAL 0440



BRONZE 1134









Order a memo sample: info@climatereadyfabrics.com.a